


# 30AM Push Around Vertical Lift

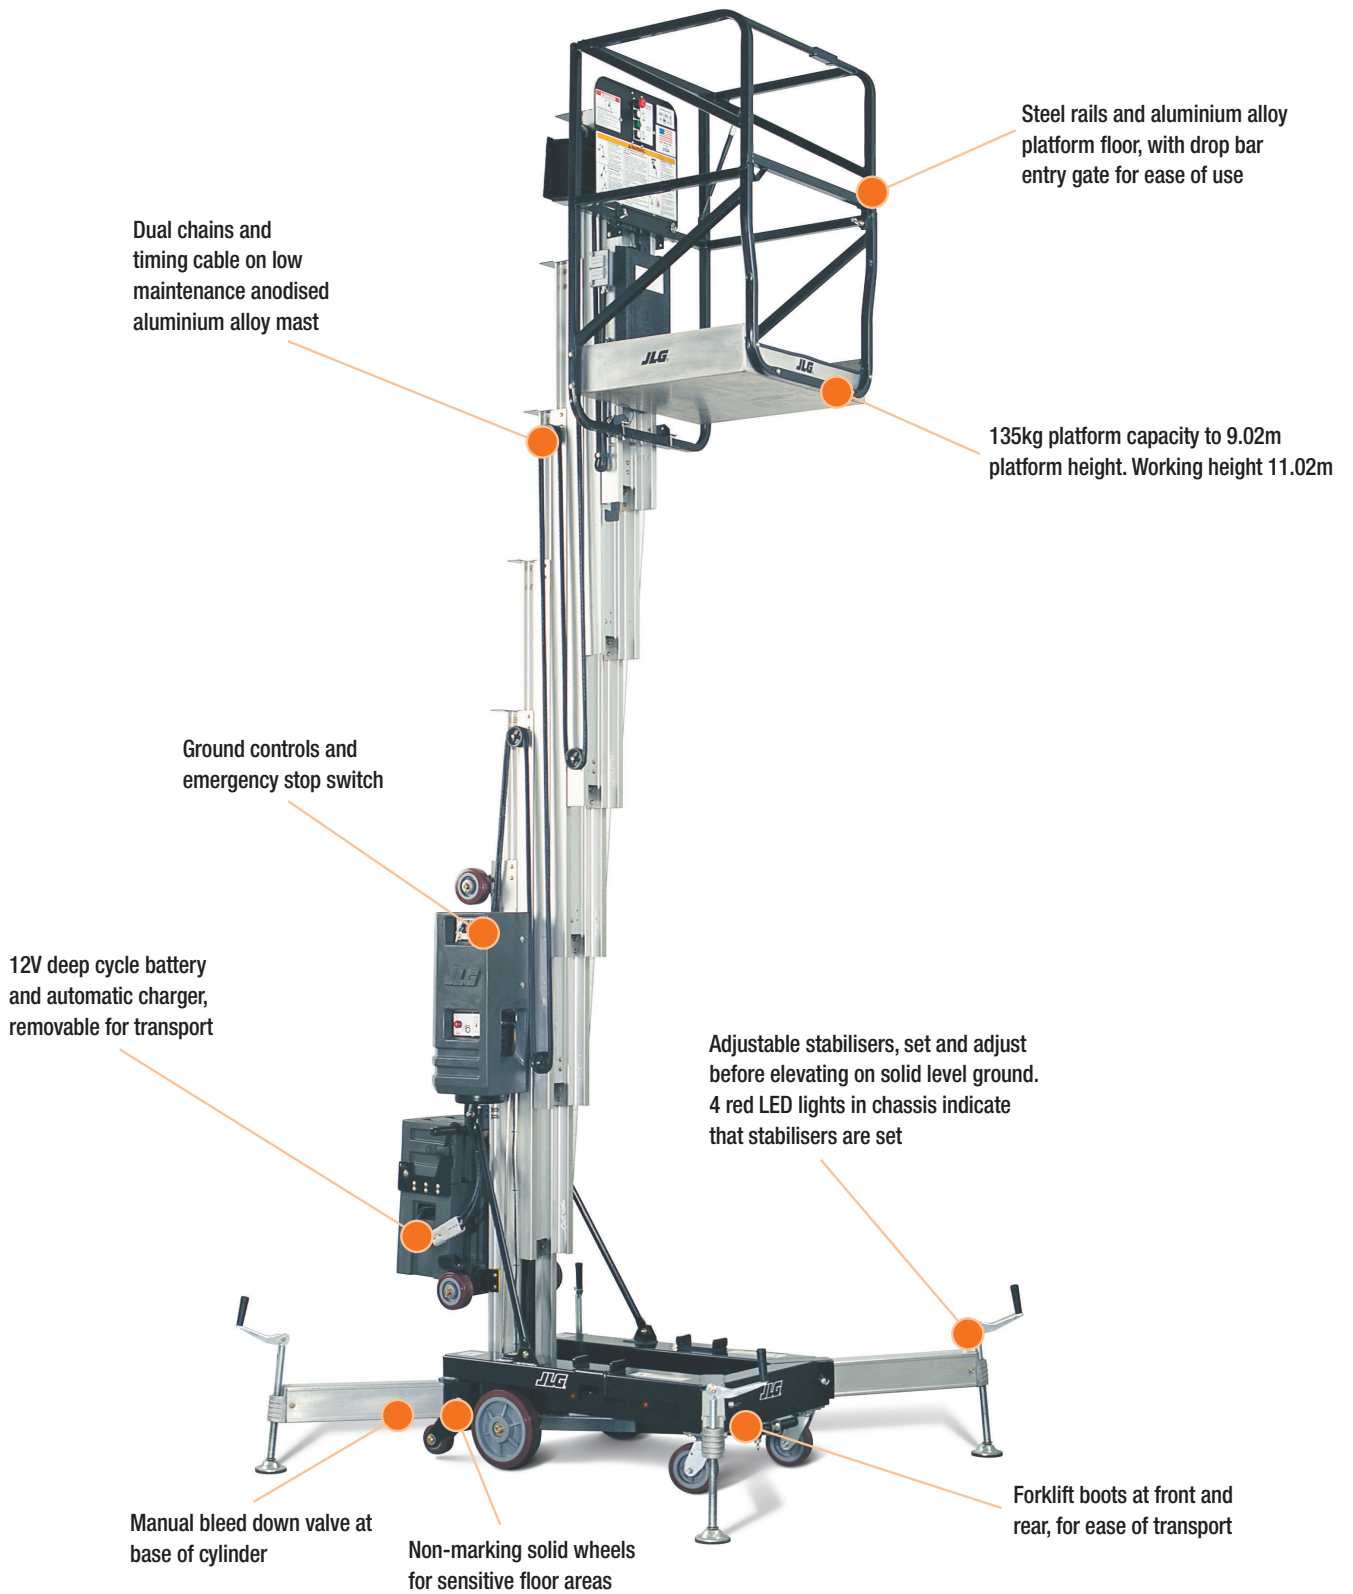

Dual chains and timing cable on low maintenance anodised aluminium alloy mast

Steel rails and aluminium alloy platform floor, with drop bar entry gate for ease of use

135kg platform capacity to 9.02m platform height. Working height 11.02m

Ground controls and emergency stop switch

12V deep cycle battery and automatic charger, removable for transport

Adjustable stabilisers, set and adjust before elevating on solid level ground. 4 red LED lights in chassis indicate that stabilisers are set

Manual bleed down valve at base of cylinder

Non-marking solid wheels for sensitive floor areas

Forklift boots at front and rear, for ease of transport

## QUESTIONS TO ASK

- What are the ground conditions in the work area?
- What are the floor load requirements and access to the site?
- What is the working height needed for the job?
- Is there 240V AC power available for charging?
- Is indoor and flat hard support surface needed?

## KEY SELLING POINTS

- Work in tight and confined vertical areas
- 4 easy fit outriggers with interlock switch and telltale light indicating each outrigger is locked and set
- Base can be levelled on outriggers
- Dual chain vertical mast lift
- Non-marking solid tyres
- 1 x 12V DC deep cycle battery
- Removable SCR automatic battery charger for quick recharging

## APPLICATIONS

- Facilities maintenance
- Electricians for lighting tube/globe replacements
- All maintenance work
- Factory fit outs in tight areas
- Ideal warehouse use between racking and narrow aisle areas
- Hospitals, schools and offices for suspended ceiling maintenance

## SPECIFICATIONS

### Performance:

Platform Height (max.)	9.02m
Working Height	11.02m
Lift Time	75 sec
Lower Time	39 sec
Platform Capacity Standard	135kg

### Dimensions:

Stowed Length	1.32m
Stowed Height	1.97m
Stabiliser Footprint Length	1.89m
Stabiliser Footprint Width	1.81m

### Platforms:

Standard Platform Type	Steel Rail/Alloy Floor
Overall Width	0.74m
Standard Platform Size - (WxL)	0.66 x 0.66m
Chassis Length	1.19m
Platform Entry Height	0.48m

### Power:

Power Source	Battery
DC Voltage	12V
DC Power	93 Amp hr

### Weights and Capabilities:

GVW AC	404kg
GVW DC	427kg