

# H340AJ

## HYBRID ARTICULATING BOOM

BOOM LIFT



### KEY SPECS

<b>Platform Height</b> 33-ft 10.5-in / 10.33-m	<b>Up and Over Reach</b> 17-ft / 5.17-m
<b>Horizontal Outreach</b> 19-ft 11-in / 6.06-m	<b>Platform Capacity</b> 500-lb / 227-kg

### KEY FEATURES

- Exceptional terrainability by utilizing the four independent electric-drive motors and a Tier 4 Final diesel-powered generator.
- Hybrid technology runs completely on 8 x 12v 100 amp-hour AGM batteries, which are charged by the diesel generator.
- Maximize versatility by utilizing the power of a diesel machine combined with hybrid efficiency to work both inside and outside.
- Produces low emissions with reduced fuel usage, as well as reduced noise and maintenance.

### ACCESSORIES & OPTIONS

- 1/2-in Air Line to Platform
- Ambient White Noise Alarm
- Cold Weather Package<sup>1</sup>
- Hostile Environment Kit<sup>2</sup>
- Hot Weather Package
- Inverter - 110V 1200W
- Light Packages
- Platforms -
  - Drop Bar, 30 x 36-in, 30 x 48-in, 30 x 60-in
  - Inward Self-Closing Swing Gate, 30 x 48-in, 30 x 60-in
- Platform Mesh to Mid or Top Rail<sup>3</sup>
  - Aluminum or Plastic

### STANDARD SPECIFICATIONS

#### Performance

Platform Height	33-ft 10.5-in / 10.33-m
Horizontal Outreach	19-ft 11-in / 6.06-m
Up and Over Clearance	17-ft / 5.17-m
Swing	355 Degrees Non-Continuous
Platform Capacity	500-lb / 227-kg
Platform Rotator	180 Degrees Hydraulic
Jib	4-ft / 1.22-m
Range of Articulation	139 Degrees (+79, -60)
Weight*	9,860-lb / 4,472-kg
Max. Ground Bearing Pressure	64 psi / 4.5 kg/cm <sup>2</sup>
Drive Speed (Lowered)	3.7 mph / 5.95 km/h
Gradeability	45%
Turning Radius Inside (2WS/4WS)	5-ft / 1.52-m
Turning Radius Outside (2WS/4WS)	13-ft / 3.96-m

#### Engine

Diesel- Kubota Z482	111 hp / 8.3 kW
Fuel Tank Capacity	13 gal / 49.2 L
Batteries	8 x 12V / 100 amp-hr AGM

#### Tires

Standard	9 x 20 Foam-filled
Optional	7 x 18 Solid 7 x 18 Solid Non-marking 9 x 20 Non-marking Foam-filled

#### Hydraulic System

Tank Capacity	20.6 gal / 77.9 L
---------------	-------------------

### STANDARD FEATURES

- 4-ft (1.22-m) Articulating Jib
- 4 Degree Tilt Cut-Out
- 110V-AC Receptacle in Platform
- 12V DC Auxiliary Power
- 180 Degree Hydraulic Platform Rotator
- 355 Degree Non-Continuous Swing
- All Motion Alarm
- Cast Aluminum Control Box
- Center Storage Tray
- ClearSky Smart Fleet™ Hardware (CS550)
- Horn
- Hourmeter
- Control ADE® System
- Gull-Wing Steel Turntable Hoods
- LED Motion/Amber Beacon (CS550)
- Lifting/Tie Down Lugs
- Oscillating Axle
- Platform Console Machine Status Light Panel\*\*
- Proportional Controls
- Rapid Replaceable Platform with Self-Closing Gate
- SkyGuard SkyLine™
- Swing-Out Engine Tray
- USB-A and USB-C Charger

\*Certain options or country standards increase weight.

\*\*Provides indicator lights at platform control console for system distress, low fuel, degree tilt light and foot switch status.

1. Includes Battery Blanket, Hydraulic Tank Heater, Engine Block Heater Pad.  
2. Includes Console Cover, Boom Wipers and Cylinder Bellows.  
3. Requires Self-Closing Gate; Not Compatible with Platform Rail Extensions.

Additional Accessories and Options Available Via JLG Aftermarket.

# H340AJ



## HYBRID ARTICULATING BOOM

BOOM LIFT




### DIMENSIONS

All dimensions are approximate

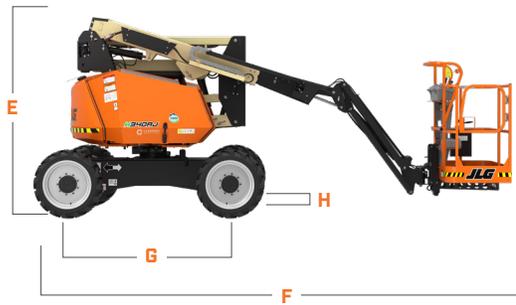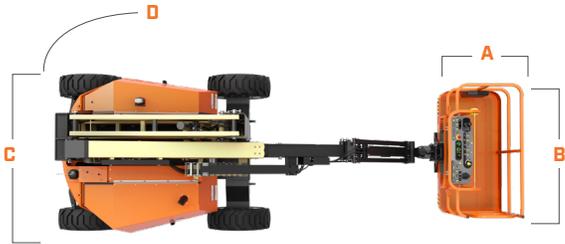

- A. Platform Width 30-in / 76-cm
- B. Platform Length 60-in / 1.22-m
- C. Machine Width 6-ft 4-in / 1.93-m
- D. Tailswing 2-in / 5.08-cm
- E. Machine Height 6-ft 7-in / 2-m
- F. Machine Length 18-ft 2-in / 5.52-m  
13-ft 1-in / 3.98-m with Jib Stowed
- G. Wheelbase 6-ft 2-in / 1.87-m
- H. Ground Clearance 10-in / 26-cm

### REACH DIAGRAM

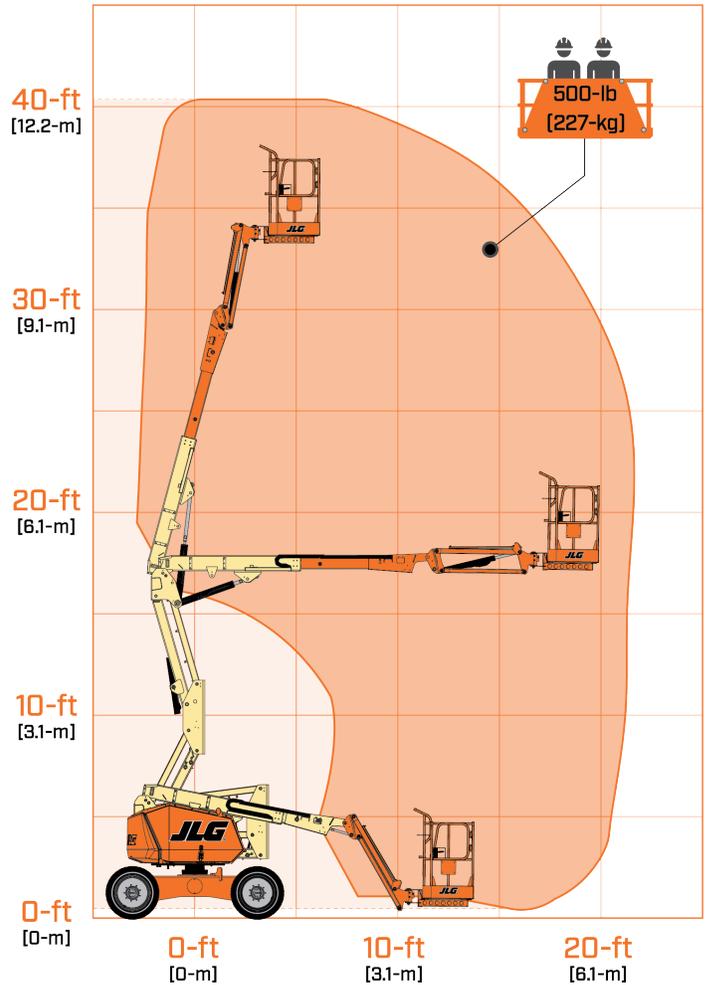

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



JLG INDUSTRIES, INC.  
Toll-free US 877-JLG-LIFT  
JLG.com

An Oshkosh Corporation Business